



SS-1000 HPS Starter Smart Starter Series


The SS-1000 Smart Starter is a compact High Pressure Sodium starter designed to operate the 1000W HPS lamp

Features

- Eliminates the need to replace conventional starters during prolonged operation with "End of Life" lamps
- Greatly reduces maintenance and repair costs
- Operates with most 1000 watt HPS lamps and ballasts with a nominal lamp operating voltage of 250 volts
- Simplifies location and documentation of bad lamps by not attempting to restart "End of Life" lamps
- Wire for wire replacement in most applications
- Performs as a conventional starter during initial application of power and after momentary power interruptions
- Directly replaces most conventional HPS starters on the market today
- Automatically removes itself from the circuit in the event that the lamp fails to start or has been removed from the socket
- Rests automatically after brief power interruptions (Approx. 120 milliseconds)
- UL recognized component
- Suitable for use in ambient temperatures to 90°C




Wiring

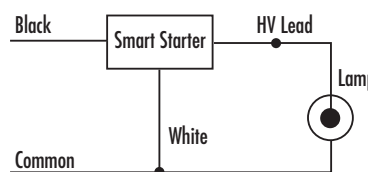

Dimensions

12" leads, stripped .25"

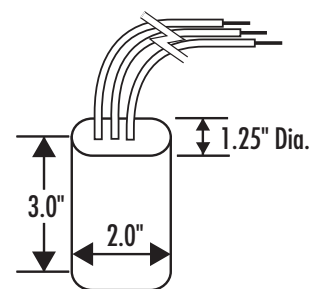

12/15/01

Thomas Research Products

1111 N. Old Rand Rd.
Wauconda, Illinois 60084

Phone 888-877-4456
Fax 847-526-9259

www.thomsaresearchproducts.com